


SEIZES[®]

S E A T I N G

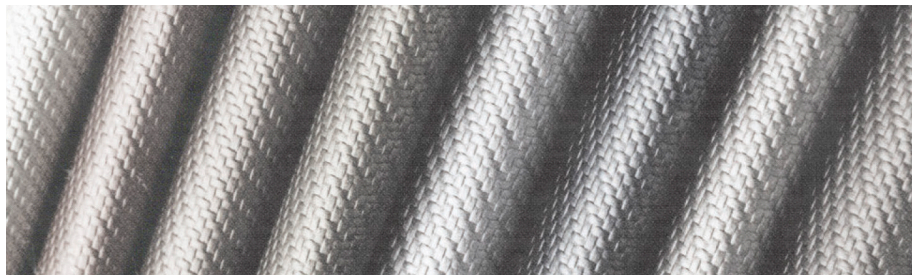


COATED FABRICS

Zander

PERMAGUARD®
SUPERIOR STAIN RESISTANCE




Carbon Fiber

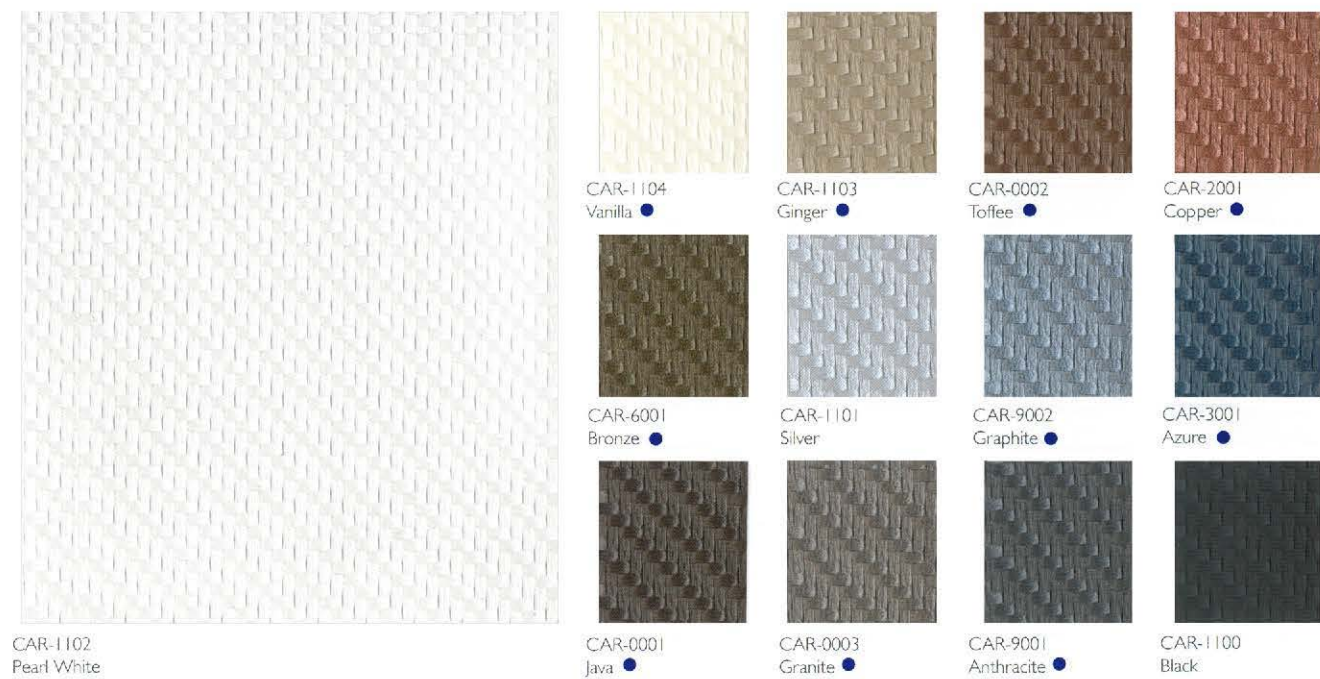

Diamante™ ●

Ag SILVERGUARD® PERMABLOK3®
SILVER ION TECHNOLOGY ADVANCED VINYL PROTECTION

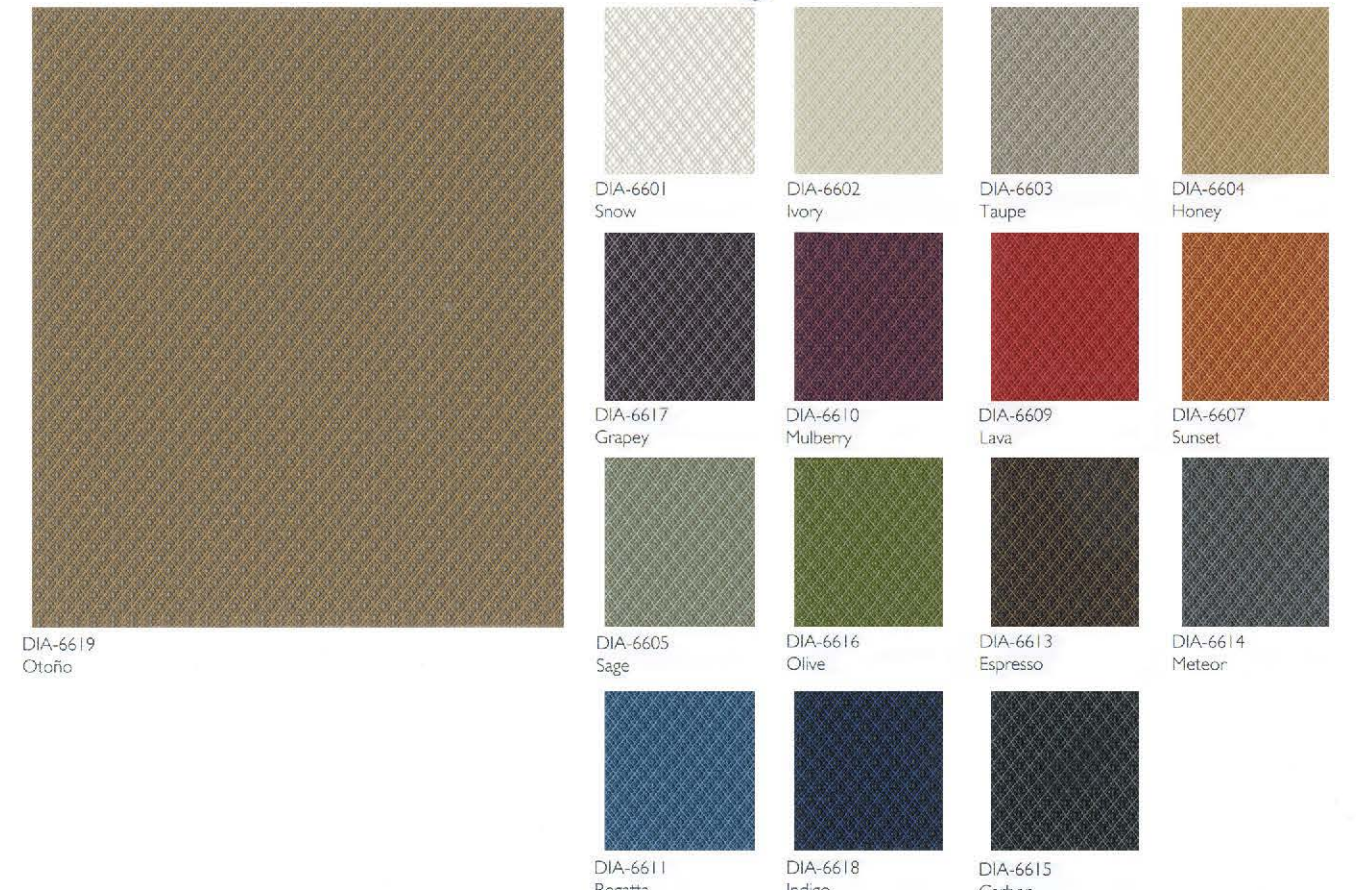

Pegasus



Polaris



Marlin

PERMAGUARD®
SUPERIOR STAIN RESISTANCE



Beluga

PERMAGUARD®
SUPERIOR STAIN RESISTANCE



Silvertex™


Ag SILVERGUARD® PERMABLOK®
SILVER ION TECHNOLOGY ADVANCED VINYL PROTECTION



Dolphin



● New | Nuevo | Nouveau | Neu | Nuovo
*No Master samples (not suitable for colour matching and quality control / testing purposes).
Please contact us for further details.

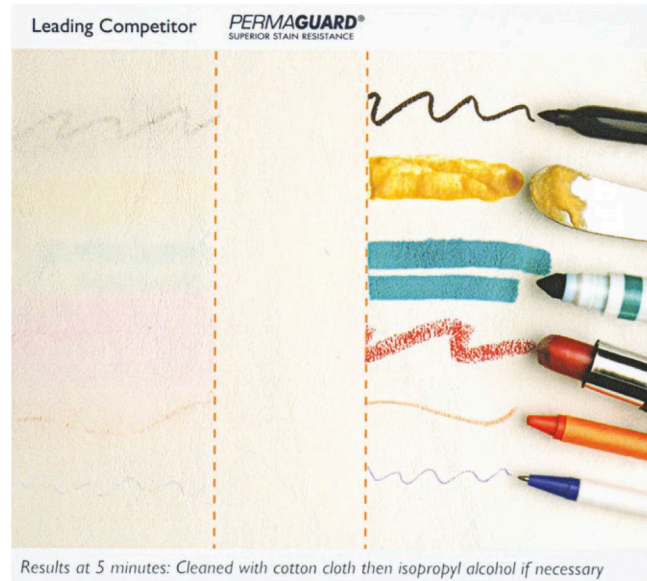

SUPERIOR STAIN RESISTANCE

Spreading's proprietary barrier coating makes maintenance easy. Most difficult stains are effortlessly cleaned with a dry tissue, and stubborn soiling may be eliminated with isopropyl alcohol. Not only do stains disappear in seconds, but **PERMAGUARD®'S** provides unequalled resistance to scratches, scuffs, and abrasion. No other marine vinyl surpasses **PERMAGUARD®'S** stain resistance and longterm, trouble-free performance.

CARE AND CLEANING GUIDE

- The vinyl should be cleaned periodically in order to maintain its appearance and prevent build-up of dirt and contaminants.
- Any stain, spills, or soiling should be cleaned up promptly to prevent the possibility of permanent staining.
- Use soft soapy solutions or special cleaning products for vinyl fabrics to remove stains on the surface of the material. Remove only with a damp white cloth.
- Lacquers, strong cleaners, detergents, xylene-based solutions, acetone, or *MEK* cause immediate damage and contribute to the deterioration of the material. The use of such cleaners is at the owner's risk.
- Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. *SPRADLING* International GmbH and *EURO SPRADLING* S.L. will not assume responsibility for dye transfer caused by external contaminants and possible permanent staining caused by this phenomenon.

COMPOSITION

100% Polyester Hi-Loft²™ Backing
100% Polyester Ultra Hi-Loft²™ Backing
100% Polyester Knit Backing
Weight (g/m²)
Roll Size (m)
Roll Width (cm)

| | Beluga | Carbon Fiber | Diamante | Dolphin | Marlin | Pegasus | Polaris | Silvertex | Zander |
|-----|--------|--------------|----------|---------|--------|---------|---------|-----------|--------|
| • | • | | | | • | • | • | • | • |
| • | | | • | | | | | | |
| • | | | | • | | | | | |
| 657 | 657 | 680 | 657 | 657 | 657 | 657 | 657 | 685 | 657 |
| 30 | 27.4 | 30 | 30 | 30 | 27.4 | 27.4 | 30 | 30 | 30 |
| 137 | 137 | 137 | 137 | 137 | 137 | 137 | 137 | 137 | 137 |

FLAME RETARDANCY

EN 1021 / Part 1 and 2
Directive 95/28/CE
DIN 4102 B2
FMVSS 302
(MED) Council Directive 96/98 EC on marine equipment

| | BEL | CAR | DIA | DOL | MRL | PEG | POL | STX | ZAN |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| • | • | • | | | • | • | • | • | • |
| • | • | • | | | • | • | • | • | • |
| • | | | • | | • | | | • | • |
| • | • | • | • | | • | • | • | • | • |
| • | | • | | | • | | | • | • |

The term "flame retardancy" and any corresponding data refer to the typical performance in the specific test indicated and should not be construed to imply the behavior of this or any other materials under actual fire conditions.

FINISHES AND TREATMENTS

PERMAGUARD®
SUPERIOR STAIN RESISTANCE
PERMABLOK®
ADVANCED VINYL PROTECTION
SILVERGUARD®
SILVER ION TECHNOLOGY
Mildew Resistant Backing and Face
UV Stabilized Pigments (1000 hours)
Cold Crack

| | BEL | CAR | DIA | DOL | MRL | PEG | POL | STX | ZAN |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| • | | | | | • | | | | • |
| • | | | • | | | | | • | |
| • | | | • | | | | | • | |
| • | • | • | • | • | • | • | • | • | • |
| -23°C | -23°C | -23°C | -23°C | -23°C | -23°C | -23°C | -23°C | -23°C | -23°C |

***PERMABLOK®** is a proven vinyl protective coating that is engineered to create a tough, effective barrier against germs abrasions and stains.

PERMABLOK®, **PERMAGUARD®** and **SILVERGUARD®** are registered trademarks of Spradling, Holdings, Inc
Ultra Hi-Loft²™, **Hi-Loft²™**, **Silvertex™** and **Diamante™** are trademarks of Spradling Holdings, Inc

- Exzellente Abriebfestigkeit / Resistencia a la abrasión / Resistance a l'abrasion / Abrasion resistant / Resistenza all'abrasione
- Wasserabweisend / Impermeabilidad / Imperméabilité / Impermeability / Impermeabilità
- Lichtechtheit / Durabilidad del color a la luz / Résistance à la lumière / UV resistant / Resistenza raggi solari
- Kältebruchresistent / Resistencia a bajas temperaturas / Résistance aux basses températures / Low temp. resistant / Resistenza alla rottura da freddo

- Antimikrobiell ausgerüstet / Resistencia a microorganismos / Protection contre des micro-organismes / Mildew resistant / Antimuffa
- Einfache Reinigung / Fácil limpieza / Facilité d'entretien / Easy to clean / Facile da pulire
- Flammhemmend ausgerüstet / Retardancia al fuego / Retardement au feu / Flame retardant / Ritardanza al fuoco
- Chemikalienbeständig* / Resistencia a químicos* / Résistance aux produits chimiques* / Chemical resistant* / Resistenza chimica*

*Bitte anfragen / Pregunta por asesoría / Sur demande / Upon request / Si prega d'informarsi



SERIES USA

Corporate Headquarters

20900 NE 30th Avenue

Suite 901

Miami, FL 33180

P 1 - 800 - 729 - 1190 | + 1 - 305 - 932 - 4626

E info@seriesseating.com

SERIESSEATING.COM

SERIES Colombia

Carrera 7A Km. 21

Chía, Cundinamarca 250008

Código Postal 250008

P + 57 - 1 - 676 - 0225

E info@seriesseating.com

SERIESSEATING.COM

SERIES Australia PTY LTD

57 Carnarvon Drive

Frenchs Forest, NSW 2086

P + 61 - 2 - 9986 - 3878 | + 61 - 412 - 085 - 982 | + 61 - 0412 - 435 - 089

E rxp@hadleyaustralia.com.au | hadley@hadleyaustralia.com.au

HADLEYAUSTRALIA.COM.AU | SERIESSEATING.COM

Member of Australasian Furnishing Research & Development Institute

© 2016 SERIES® Seating

Printed in USA by SERIES® Printing on FSC certified paper

1004161553

